




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G11B 7/24	A1	(11) International Publication Number: WO 97/09716 (43) International Publication Date: 13 March 1997 (13.03.97)
(21) International Application Number: PCT/IB96/00874 (22) International Filing Date: 29 August 1996 (29.08.96) (30) Priority Data: 95202445.3 8 September 1995 (08.09.95) EP (34) Countries for which the regional or international application was filed: NL et al. (71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventors: BRAAT, Josephus, Johannes, Maria; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). VOS, Gerardus, Johannes, Josephus; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: FAESSEN, Louis, M., H.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).	(81) Designated States: CA, CN, CZ, HU, JP, KR, MX, PL, RU, SG, VN, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: OPTICAL MULTILAYER INFORMATION CARRIER

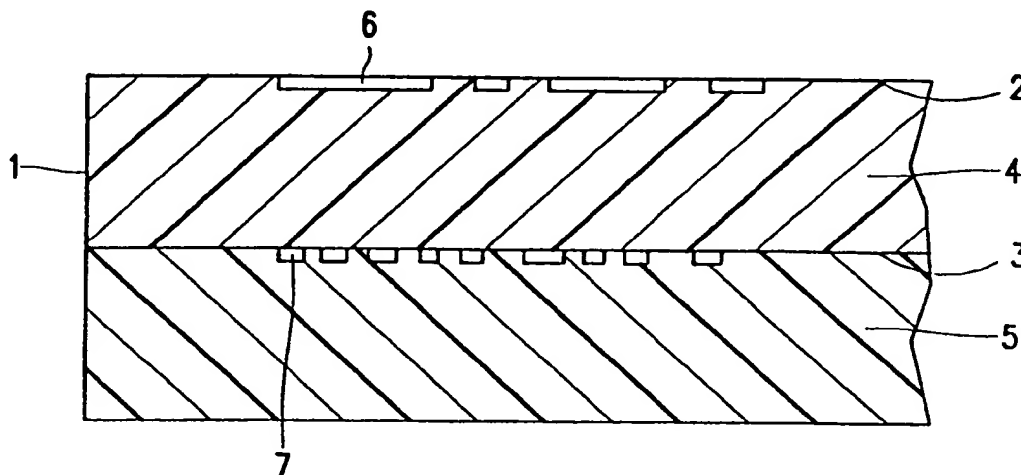

(57) Abstract

A record carrier is described, which has standard and high-density information layers. The standard density layer (2), e.g. in a standard CD format, is positioned at the bottom of a substrate, and is read out through the substrate with a laser beam. The thickness of the substrate is within the CD specification, e.g. 1.2 mm. At least one high-density layer (3) is formed by a material which is (nearly) transparent for the laser wavelength of standard CD players ($\lambda = 780$ nm), but is (at least partially) reflective for shorter wavelengths used for high-density discs ($\lambda = 635$ nm). To achieve a high density, a smaller track pitch and smaller pits are used in the high-density layer(s). To achieve better reading signals from both layers, the high-density layer is positioned closer to the side of entrance of the laser beam in the substrate. This enables a higher numeric aperture of the focusing lens and, therefore, a smaller spot for the shorter wavelength. The high-density layer is preferably positioned midway in the substrate e.g. at 0.6 mm, because in that case the high-density layer configuration will be compatible with two-sided high density discs which have a total thickness of 1.2 mm. The information content of the standard layer may be duplicated on the high-density layer, or it may be represented by a different coding scheme.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Optical multilayer information carrier.

The invention relates to an information carrier comprising a substrate and information layers having optically readable effects which effects represent information, which information layers comprise a standard layer having effects of standard information density readable by an optical beam formed by light of a first wavelength, the beam, upon
5 reading, entering on an entrance side of the substrate, the standard layer being located opposite the entrance side, and a high-density layer having effects of high information density, the high-density layer being substantially transparent to the optical beam of the first wavelength, the high-density layer being at least partially reflective to light of a second wavelength suitable for reading effects of high information density.

10

Such a multilayer information carrier is known from EP-0 520 619. The described optical recording medium comprises two recording layers separated by a support layer on a substrate. The first recording layer is reflective to light of a first wavelength and transparent to light of a second wavelength and the second recording layer is reflective to the
15 light of the second wavelength. Information can be read from a layer through the substrate by focusing a beam of an appropriate wavelength on the respective layer, scanning the effects and transforming the reflected light into a read signal. The information is recovered from the read signal by detecting the changing of an optical characteristic of the reflected light. A recorded layer comprises either standard-density or high-density optically readable effects. A
20 problem of the known disc is, that during reading the second layer there is a disturbance in the read signal caused by the first layer, which has to be passed twice by the beam. This may cause errors in the recovered information.

It is an object of the invention to provide an information carrier in which, upon
25 reading, the quality of the read signal is improved. For this purpose, the information carrier according to the invention is characterized in that the high-density layer is located between the standard layer and the entrance side, the distance between the high-density layer and the entrance side being substantially smaller than the distance between the standard layer and the entrance side. This has the advantage, that the read signal when reading the standard layer is

less disturbed.

The invention is also based also on the following recognition. While reading the standard layer the optical beam has a larger diameter when passing a high-density layer spaced apart compared to the diameter when using a set of layers spaced closely on one side of the substrate. The irregularities in the high-density layer, such as recorded effects, repetitively recorded data or header patterns, will hardly affect the read signal. However the read signal from the high density layer may be impaired by dust particles and scratches on the surface for the same reason. So the high density layer should be located closer to the entrance side, but not too close to prevent impairment by dust, etc.

10 A further advantage is a better quality of the read signal when reading the high-density layer. The size of the spot as focused on a layer is a function of the wavelength of the optical beam and the NA (numeric aperture) of the focusing lens. However, if the NA is increased to decrease the spot size, it is necessary to reduce the substrate thickness in order to reduce the influence of disc tilt on the quality of the radiation beam. A smaller spot results in less interference from adjacent effects and a better read signal. Alternatively, a higher information density (using the same wavelength and the same optical requirements) may be attained, because a reduced-size scanning spot allows smaller effects to be used, e.g. smaller pits in tracks with a smaller track pitch. A further advantage of the greater distance between the standard layer and the high-density layer is, that players not arranged for playing multilayer records, are less likely to be disturbed by the other layer, e.g. may in error try focusing their beam on the wrong layer. This applies for example to a standard CD player reading the standard layer and to a high-density player not arranged for discriminating between layers and therefore only reading the high-density layer. Also portable players, when subject to shocks, will less likely focus on a wrong layer.

25 An embodiment of the information carrier is characterized in that the distance between the high-density layer and the entrance side is substantially equal to half the distance between the standard layer and the entrance side. This has the advantage, that there is a balance between decreasing the disturbing effects when reading the standard layer and increasing the disturbance from dust and surface defects when reading the high-density layer. 30 A further advantage is, that when manufacturing the information carrier, two substrate layers of the same thickness supporting the information layers are to be processed.

An embodiment of the information carrier is characterized in that the distance between the standard layer and the entrance side is about 1.2 mm. This has the advantage, that a disc according to the CD standard can be formed, being playable on standard CD

players and on high-density players.

An embodiment of the information carrier is characterized in that the high-density layer is partly transmissive to light of the second wavelength enabling the standard layer to be scanned. This has the advantage, that a high-density player may be arranged for
5 reading the standard layer.

An embodiment of the information carrier is characterized in that the high-density layer is substantially fully reflective to light of the second wavelength. This has the advantage, that a high-density player not being arranged for reading the standard layer, will not be disturbed by the presence of the standard layer, as this layer is substantially invisible
10 at the second wavelength.

An embodiment of the information carrier is characterized in that the high-density layer accommodates amongst other things the same information as the standard layer. This has the advantage, that there is no need for a high-density player to change layers when using the information.

15 An embodiment of the information carrier is characterized in that the high-density layer accommodates information recorded in the standard layer which information is coded differently from the information in the standard layer. This has the advantage, that while a standard player can present certain information, an improved version of the same information can be presented by the high-density player.

20 An embodiment of the information carrier is characterized in that the information carrier comprises two substrate layers separated by a bonding agent, the substrate layers each supporting an information layer. This has the advantage, that each substrate supports an information layer and can be processed separately, e.g. optical readable effects can be pressed in both substrates. The information carrier is easily formed by finally
25 bonding the two sections together.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

In the drawings:

30 Figure 1 shows the layer structure of a new information carrier,
Figure 2 shows an information carrier with a beam of a standard CD player, and

Figure 3 shows an information carrier with a beam of a HD player.

Figure 1 shows an information carrier according to the invention. The carrier may be disc-shaped like the known audio CD, but may be shaped alternatively like optical tape or card. A description of the standard CD can be found in the title "Principles of optical disc systems" by Bouwhuis et al. ISBN 0-85274-785-3. The information carrier

5 according to the invention comprises a first substrate layer 5 which accommodates at least one high-density information layer 3. The high-density information layer 3 is substantially transparent to a first wavelength, e.g. infrared radiation (for example, $\lambda = 780$ nm), but shows at least partially reflection for a second, shorter, wavelength, e.g. red laser radiation (for example, $\lambda = 635$ nm). The high-density layer 3 comprises optically readable effects 7

10 of a high-density. The effects may be bumps or pits or other optically detectable effects, for example like phase change or MO (magneto optical) recording. Subsequently, the first substrate 5 is followed by a second substrate 4 on which a standard density information layer 2 is provided. The standard density layer 2 comprises optically readable effects 6 of a low density having relatively large dimensions. The substrates together provide the mechanical

15 stiffness of the information carrier as a whole, although not necessarily in equal amounts. The total structure has a relatively large distance between high-density and standard layer, compared to the known multilayer structure of EP 0520619. The information layers are to be scanned by an optical beam entering through the first substrate (from the bottom side in figure 1). When scanning the high density layer with a beam of radiation of the second

20 wavelength sufficient radiation is reflected for detecting the effects of the high-density layer. When scanning the standard density layer with a beam of radiation of the first wavelength substantially all radiation, e.g. 70 %, is reflected for detecting the effects of the standard layer. In scanning the standard layer the beam of the first wavelength passes the high-density layer twice and it may be reflected for a small portion by the high density layer. However,

25 as there is a relative large distance between the focal plane and the high-density layer, irregularities such as recorded effects, header patterns or repetitive data patterns are hardly affecting the reflected radiation, as they are averaged out by the relatively large diameter of the beam when crossing the layer on a large distance from the focal plane. Moreover, players arranged only for reading a standard information layer on a specific depth, such as

30 CD players for CD with a substrate thickness of 1.2 mm, are not affected in their operation if a minimum distance is kept between the layers of about $300 \mu\text{m}$, i.e. 25 %, of the total substrate thickness. However the distance between the high density layer and the entrance side of the substrate must be a minimal value H for limiting the adverse effects of dust particles and fingerprints on the surface. It has been found, that the safe minimal value H is

dependent on the NA (numerical aperture of the focusing lens), and can be expressed as $H > 84/NA$. For a NA of 0.6 a minimal value H of 140 μm is found. For a disc compatible to the CD the high-density layer or layers should therefore have a distance between 140 μm and 900 μm from the entrance side, i.e. between circa 10% and 70% of the total substrate thickness.

An embodiment of the information carrier according to the invention has the high-density layer substantially halfway between the entrance side and the standard layer. This has been found to be a good compromise between the need to increase the distance between the standard layer and the high-density layer and the need to keep the distance between the surface of the substrate at the entrance side and the high density layer as large as possible.

An embodiment of the information carrier according to the invention has a total thickness of the two carrier substrates of about 1.2 mm, the standardized substrate thickness for CD discs. The standard density layer is a CD information layer and comprises a highly reflective mirror layer that properly reflects both infrared and red laser radiation and meets the minimum reflection requirement for CD with $\lambda \approx 800 \text{ nm}$, i.e. 70%. A well-known material for the mirror layer is Aluminium. In combination with the previous embodiment an information carrier comprises two substrate layers of about 600 μm thickness (practical range of 500 - 700 μm).

Figure 2 shows the disc with a beam 8 having a first wavelength, e.g. of a standard CD player. This beam 8 hits the standard layer 2 and is substantially not impeded by the high-density layer or layers 3.

Figure 3 shows the disc with a beam 9 of a high-density player having a second wavelength shorter than the first wavelength. The beam 9 hits the high-density layer 3.

In an embodiment of the disc the high density layer is substantially fully reflective to the radiation of the second wavelength. In this case the disc appears to a high-density player as a 'high-density only' disc, as the standard density layer cannot be scanned by the beam of the second (shorter) wavelength. The disc can therefore be played by a 'single-layer only' high density player, as no special measures are necessary to focus on or scan the high-density layer.

In an embodiment of the disc the high density layer is partially transmissive to the radiation of the second wavelength. In this case it is possible to read all the information layers by focusing on the respective layers. An embodiment of a high-density player that implements such a reading method is disclosed in EP-A-95200619.5 (PHN 15.252).

Moreover, the standard information layer having CD density can be read out on a standard CD player without encountering difficulties, provided that the intermediate high-density information layer(s) are sufficiently "invisible" by a low reflection for the first wavelength used by standard CD players. In practice, 70% of the incident light should be returning to a
5 detector reflected by the standard density layer.

In an embodiment of the disc the high density layer accommodates amongst other things the same information as the standard layer. An example is a CD-ROM, in which the standard layer comprises a basic version of a software package for use on PC's and in which the high-density layer comprises the same software, but also a lot of extensions and
10 additional data-files. A versatile PC with a high-density reader doesn't need to switch between layers, but uses the full-fledged high density version of the software. Another example is an opera with audio only on the standard layer and audio and video on the high density layer.




In an embodiment of the disc the high-density layer accommodates information
15 recorded in the standard layer which information is coded differently from the information in the standard layer. Such a disc comprises certain information, e.g. a musical piece coded in standard CD audio quality on the standard density layer. For high-end audio fans an improved version of the same information is recorded on the high-density layer, e.g. a surround sound version or higher resolution version of the same musical piece.

20 In an embodiment of the disc the information carrier comprises two substrate layers separated by a bonding agent, the substrate layers each supporting an information layer. Each substrate layer has been pressed in a mould and is provided with a respective information layer. The information carrier is formed by bonding the two substrates together by a bonding agent. The bonding agent may also have the function of (at least partially)
25 reflective layer, or the reflective function may be realized by a separate layer applied on the substrate layer beforehand. An embodiment of the disc according to the invention comprises several high density layers. For example one high-density layer may be pressed on the top side of the first substrate 5 and a second high-density layer may be pressed on the bottom side of the second substrate 4. The top side of the second substrate is provided with the
30 standard density layer. Both substrates should be separated by a thin support layer, e.g. the bonding agent. While scanning as shown in figure 3 the beam 9 having the second (shorter) wavelength must be focused on one of the high density layers 3.

CLAIMS

1. Information carrier comprising a substrate and information layers having optically readable effects which effects represent information, which information layers comprise a standard layer having effects of standard information density readable by an optical beam formed by light of a first wavelength, the beam, upon reading, entering on an entrance side of the substrate, the standard layer being located opposite the entrance side, and a high-density layer having effects of high information density, the high-density layer being substantially transparent to the optical beam of the first wavelength, the high-density layer being at least partially reflective to light of a second wavelength suitable for reading effects of high information density, characterized in that the high-density layer is located between the standard layer and the entrance side, the distance between the high-density layer and the entrance side being substantially smaller than the distance between the standard layer and the entrance side.
2. Information carrier as claimed in Claim 1, characterized in that the distance between the high-density layer and the entrance side is substantially equal to half the distance between the standard layer and the entrance side.
3. Information carrier as claimed in Claim 1 or 2, characterized in that the distance between the standard layer and the entrance side is about 1.2 mm.
4. Information carrier as claimed in Claim 1, 2 or 3, characterized in that the high-density layer is partly transmissive to light of the second wavelength enabling the standard layer to be scanned.
5. Information carrier as claimed in Claim 1, 2 or 3, characterized in that the high-density layer is substantially fully reflective to light of the second wavelength.
6. Information carrier as claimed in one of the preceding Claims, characterized in that the high-density layer accommodates amongst other things the same information as the standard layer.
7. Information carrier as claimed in Claim 1, 2, 3, 4 or 5, characterized in that the high-density layer accommodates information recorded in the standard layer which information is coded differently from the information in the standard layer.
8. Information carrier as claimed in one of the preceding Claims,

characterized in that the information carrier comprises two substrate layers separated by a bonding agent, the substrate layers each supporting an information layer.

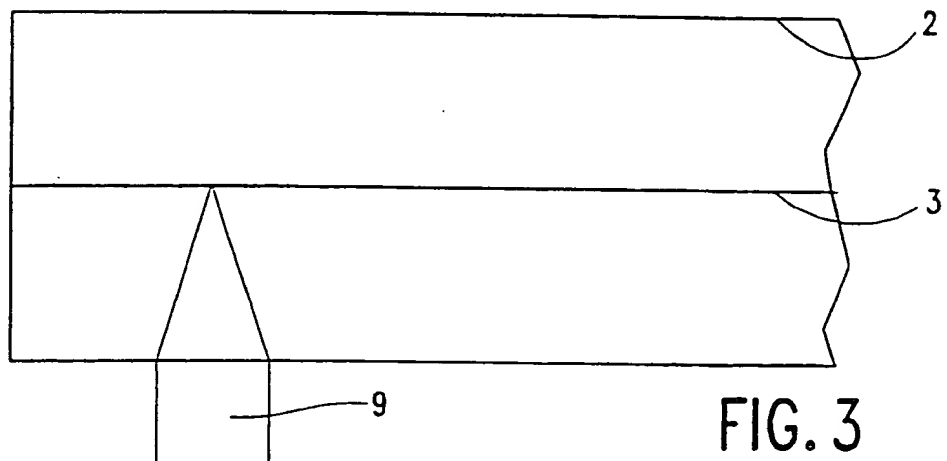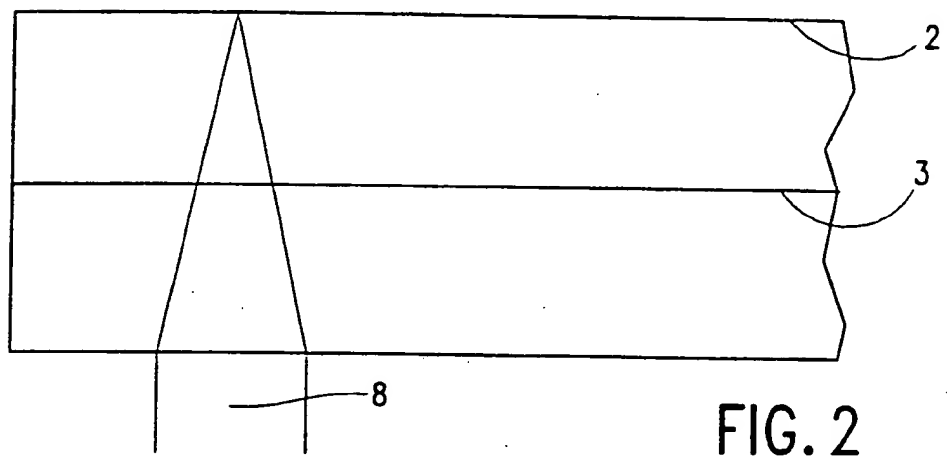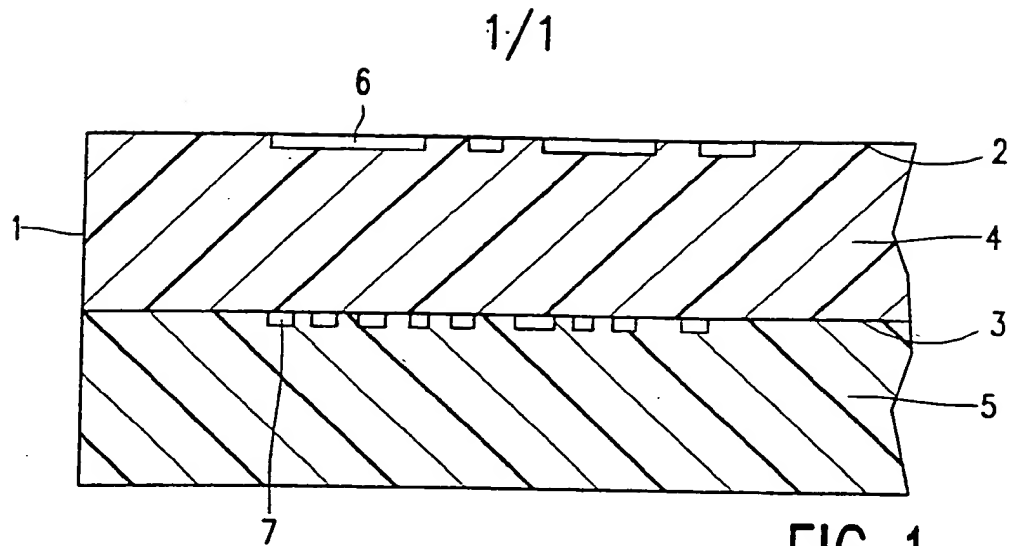

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 96/00874

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G11B 7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPAT, IFIPAT, WPIL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E,X	EP 0745985 A2 (VICTOR COMPANY OF JAPAN, LIMITED), 31 May 1996 (31.05.96), figure 4, abstract --	1-8
E,A	EP 0737966 A1 (SONY CORPORATION), 10 April 1996 (10.04.96) --	1-8
A	EP 0520619 A1 (PIONEER ELECTRONIC CORPORATION), 30 December 1992 (30.12.92) --	1-8
A	GB 2017379 A (NV PHILIPS' GLOEILAMPENFABRIEKEN), 22 March 1978 (22.03.78) -- -----	1-8

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 February 1997

Date of mailing of the international search report

12 -02- 1997

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Benny Andersson

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

28/10/96

International application No.
PCT/IB 96/00874

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP-A2-	0745985	31/05/96	NONE		
EP-A1-	0737966	10/04/96	NONE		
EP-A1-	0520619	30/12/92	JP-A-	5006571	14/01/93
			US-A-	5485452	16/01/96
GB-A-	2017379	22/03/78	AT-B-	363701	25/08/81
			AU-B-	525972	09/12/82
			AU-A-	4534779	27/09/79
			CA-A-	1149060	28/06/83
			CH-A-	643387	30/05/84
			DE-A,C-	2910390	04/10/79
			FR-A,B-	2420811	19/10/79
			JP-C-	1363333	09/02/87
			JP-A-	54130902	11/10/79
			JP-B-	61027815	27/06/86
			NL-A-	7803069	25/09/79
			SE-A-	7902406	23/09/79
			US-A-	4450553	22/05/84